
# XAPD31

Die cast empty control station, Harmony XAP, XB2 SL, zinc alloy, grey, M25, undrilled, 80x175x51,5mm





#### Main

Range of product	Harmony XAP
Product or component type	Die-cast empty control station
Device short name	XAPD
Product destination	For Ø 22 mm control and signalling units
Product front plate size	80 x 175 mm
Usable depth	49 mm
Number of cut-out	Without cut-out
Colour of base of enclosure	Grey (RAL 7035)
Colour of cover	Grey (RAL 7035)
Material	Die cast zinc
Sale per indivisible quantity	1
IP degree of protection	IP65 conforming to EN/IEC 60529 and EN/IEC 60947-5-1

#### Complementary

Number of vertical rows	0	
Number of horizontal rows	0	
Control station type	Metal	
Cable entry	2 x cable gland conforming to ISO	
Thread type	M25 x 1.5	
CAD overall width	80 mm	
CAD overall height	175 mm	
CAD overall depth	51.5 mm	
Net weight	0.87 kg	

### Environment

Protective treatment	TC	
Ambient air temperature for storage	-4070 °C	
Ambient air temperature for operation	-2570 °C	
Electrical shock protection class	Class I conforming to IEC 61140	
IK degree of protection	IK07 conforming to IEC 62262	
Resistance to chemical agents	Special treatment can be obtained on request	
Product certifications	EAC	

#### **Packing Units**

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	8.8 cm	
Package 1 Width	12.0 cm	
Package 1 Length	18.3 cm	
Package 1 Weight	1.002 kg	
Unit Type of Package 2	S02	


Number of Units in Package 2	6
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	6.408 kg

## Offer Sustainability

Sustainable offer status	Green Premium product				
REACh Regulation	REACh Declaration				
REACh free of SVHC	Yes				
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS  Declaration				
Toxic heavy metal free	Yes				
Mercury free	Yes				
China RoHS Regulation	<sup>™</sup> China RoHS Declaration				
RoHS exemption information	€Yes				
Environmental Disclosure	Product Environmental Profile				
Circularity Profile	No need of specific recycling operations				

## XAPD31

### Dimensions and Fixing

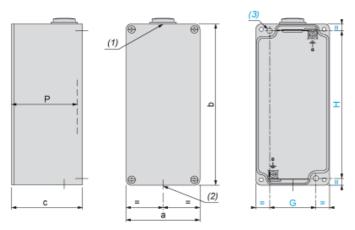

- (1): 1 hole, with blanking plug (protrusion 6 mm/0.24 in.), for cable gland ISO M25 x 1.5 (2): 1 hole, without blanking plug, for cable gland ISO M25 x 1.5 (3):  $2 \times \emptyset$  5.6 mm/0.22 in. holes, depth 19 mm/0.75 in.

- P: Usable depth

а		b		С		G		Н		Р	
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
80	3.15	175	6.89	51.5	2.03	50	1.97	160	6.30	49	1.93