


XB2SL42009

Empty control station, Harmony XAP,
aluminium, blue, 8 cut-outs, 22mm, 150 x 150 x
78 mm

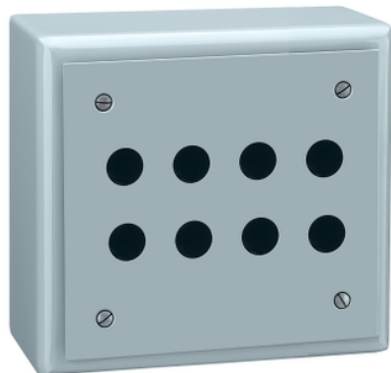

Main

Range of product	Harmony XAP
Product or component type	Empty control station
Device short name	XB2SL
Product destination	For Ø 22 mm control and signalling units
Product front plate size	150 x 150 mm
Usable depth	78 mm
Number of cut-out	8 cut-outs
Colour of base of enclosure	Blue
Colour of cover	Blue
Material	Aluminium alloy
Cable entry	2 holes with blanking plug for cable gland, clamping capacity: 12 mm
Product mounting	Flush mounting
IP degree of protection	IP54 conforming to IEC 60529 IP547 conforming to NF C 20-010

Complementary

Number of vertical rows	4
Net weight	0.96 kg





Environment

Protective treatment	TC
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...70 °C
Electrical shock protection class	Class I conforming to IEC 60536 Class I conforming to NF C 20-030

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.6 cm
Package 1 Width	19.2 cm
Package 1 Length	18.8 cm
Package 1 Weight	970.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	6
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	6.753 kg
Package 3 Height	30 cm


Offer Sustainability

REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions and Fixing

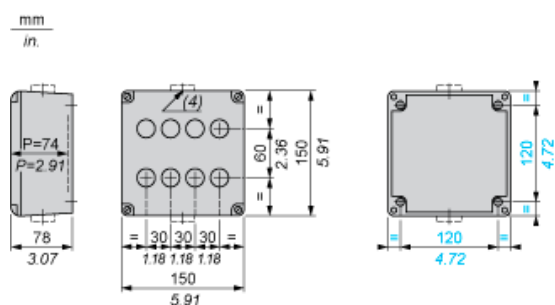

- (4) 2 holes, with blanking plug (protrusion 7.5 mm/0.29 in.), for cable glands with 12 mm/0.47 in. maximum clamping capacity.
P Usable depth