

Product data sheet

Characteristics

XVGU3SWV

USB configurable monolithic tower light,
Harmony XVGU, multi color programmable
lights 60mm, steady/flashing LED buzzer



Main

Range of product	Harmony XVGU
Product or component type	USB configurable monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Buzzer
Mounting diameter	60 mm
Component name	XVGU
Light source	LED steady or flashing multi-colour
Indicator bank base type	Base with integrated buzzer
Noise level	82 dB (2 tone buzzer) at 1 m

Complementary

Material	PC: globe
Device mounting	Direct mounting
Light block color	Clear/clear/clear
[Us] rated supply voltage	5 V DC
Connector type	USB type A female
Current consumption	400 mA
Sound frequency	2700 Hz 3800 Hz
Power consumption in W	2 W
Flashing frequency	2 Hz with flashing LED unit 1 Hz with flashing LED unit
Product compatibility	Vijeo Designer 4.6 indoor use only HMIGTO XBTGT.... XBTGK.... XBTGC1. XBTGC2. XBTGH
Net weight	0.3 kg

Environment

Standards	IEC 61000-6-2 IEC 61000-6-4
Product certifications	GOST[RETURN]cUL[RETURN]CE[RETURN]RCM[RETURN]UL 508
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	0...55 °C
Electrical shock protection class	Class I
IP degree of protection	IP54

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.9 cm
Package 1 Width	7.9 cm
Package 1 Length	31.1 cm
Package 1 Weight	350.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	21
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	8.6 kg
Unit Type of Package 3	P06
Number of Units in Package 3	84
Package 3 Height	80 cm
Package 3 Width	80 cm
Package 3 Length	60 cm
Package 3 Weight	42.908 kg

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
RoHS exemption information	<input checked="" type="checkbox"/> Yes
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

Direct Base Mounting

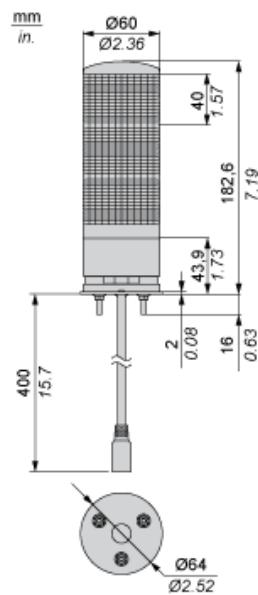


Mounting on Horizontal Support for Direct Base Mounting

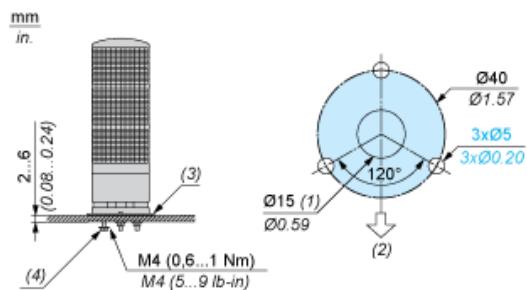

- (1) Cable outlet
- (2) Buzzer opening position
- (3) Waterproof rubber seal
- (4) Hexagon nut with flange

Mounting Orientation

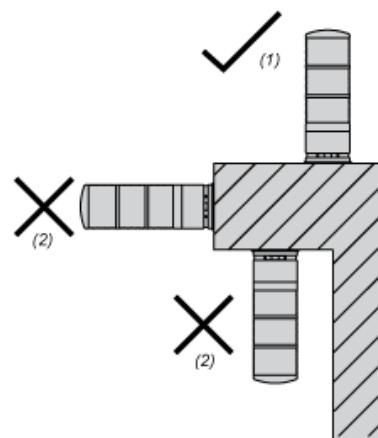

Choose a flat surface with enough strength and with little vibration for installation. Mount this product according to the figure to maintain IP characteristics

- (1) OK
- (2) NO