

Product data sheet

Characteristics

RPZF1

Harmony, Socket, for RPM1 power relays, 16 A
screw clamp terminals, mixed contact



Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RPM with 1 C/O contact
Device short name	RPZ

Complementary

[Ith] conventional free air thermal current	16 A
[Ue] rated operational voltage	250 V
Tightening torque	< 1 N.m for M3.5 screw(s) < 0.8 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Net weight	0.031 kg

Environment

Connections - terminals	Contact terminal - screw clamp terminals, 2 wires solid cable without cable end 0.5...4 mm ² / AWG 20...AWG 12 Contact terminal - screw clamp terminals, 1 wire solid cable without cable end 0.5...4 mm ² / AWG 20...AWG 12 Contact terminal - screw clamp terminals, 2 wires flexible cable with cable end 0.5...2.5 mm ² / AWG 20...AWG 14 Contact terminal - screw clamp terminals, 1 wire flexible cable with cable end 0.5...2.5 mm ² / AWG 20...AWG 14 Coil terminal - screw clamp terminals, 2 wires solid cable without cable end 0.5...2.5 mm ² / AWG 20...AWG 14 Coil terminal - screw clamp terminals, 1 wire solid cable without cable end 0.5...2.5 mm ² / AWG 20...AWG 14 Coil terminal - screw clamp terminals, 2 wires flexible cable with cable end 0.5...1.5 mm ² / AWG 20...AWG 16 Coil terminal - screw clamp terminals, 1 wire flexible cable with cable end 0.5...1.5 mm ² / AWG 20...AWG 16
Standards	IEC 61984 CSA C22.2 No 14 UL 508
Product certifications	CSA UL EAC CE
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Package 1 Weight	0.039 kg
Package 1 Height	0.300 dm
Package 1 width	0.210 dm
Package 1 Length	0.850 dm


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

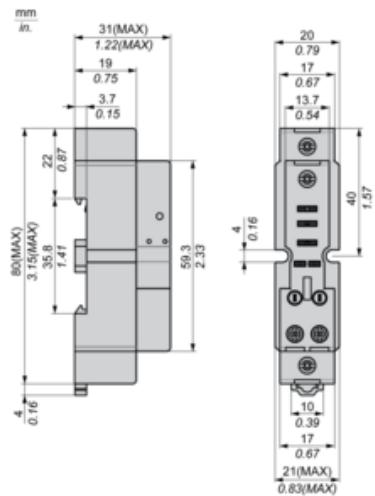

Wiring Diagram

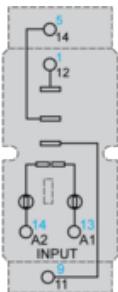

Symbols shown in blue correspond to Nema marking.