



## Main

|                  |              |
|------------------|--------------|
| Range of product | Modicon ABE7 |
|------------------|--------------|

## Environment

|                        |     |
|------------------------|-----|
| Product certifications | EAC |
|------------------------|-----|


## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.125 kg |
| Package 1 Height | 0.680 dm |
| Package 1 width  | 0.850 dm |
| Package 1 Length | 0.950 dm |


## Offer Sustainability

|                            |                                                                                                                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                |
| REACH Regulation           |  <a href="#">REACH Declaration</a>                                                                |
| REACH free of SVHC         | Yes                                                                                                                                                                                  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                                                                                                                  |
| RoHS exemption information |  <a href="#">Yes</a>                                                                              |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>                                                           |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a>                                                    |
| Circularity Profile        |  <a href="#">End Of Life Information</a>                                                          |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins                                                          |


## Dimensions

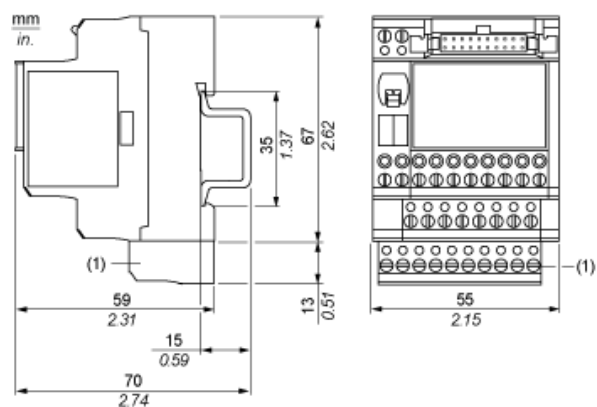


## Mounting

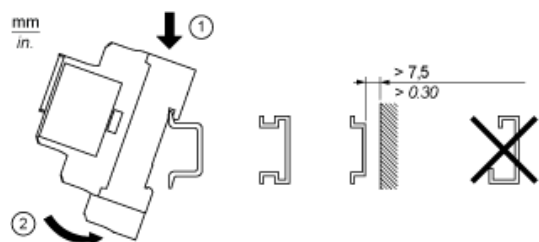

## HE10 16 Channels




## Wiring Diagram

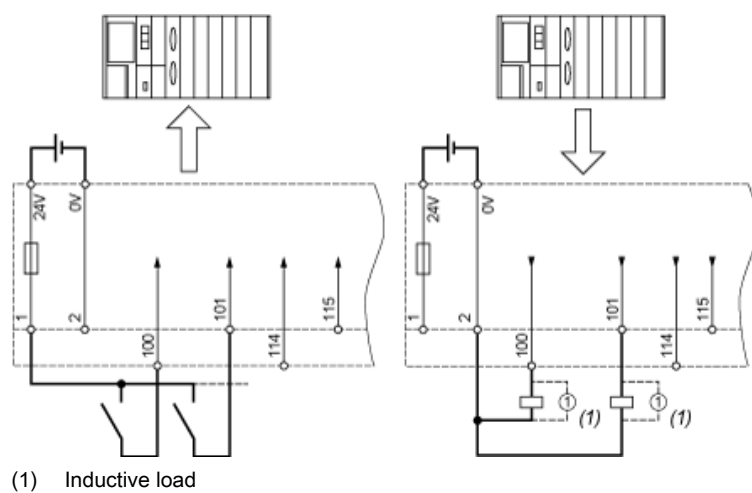

## Curves for Determining Cable Type and Length According to the Current

### 16-channel Sub-base

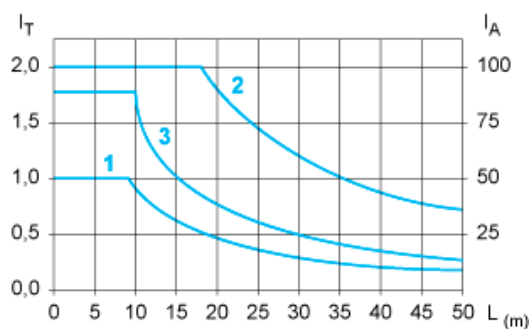

L Cable length

$I_T$  Total current per sub base (A)

$I_A$  Average current per channel (mA)

(1) TSXCDP••2 and ABFH20H••0 cables with c.s.a.  $0.08 \text{ mm}^2$  (AWG 28).

(2) TSXCDP••3 cables with c.s.a.  $0.34 \text{ mm}^2$  (AWG 22).

(3) Cables with c.s.a.  $0.13 \text{ mm}^2$  (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.