


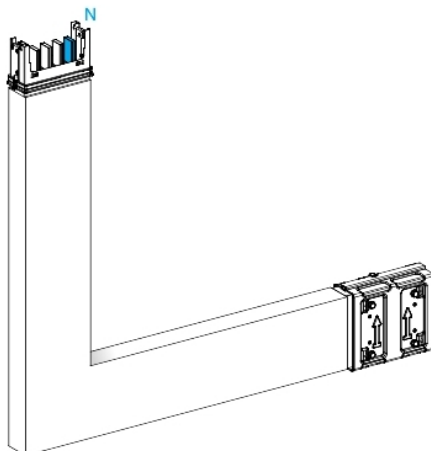

Main

Range of product	Canalis
Product name	KS
Offer type	Standard
Product or component type	Elbow
Busbar description	Standard on made to measure
Bar material	Copper
Device application	Change direction
[Ie] rated operational current	400 A at 35 °C
Direction change type	Direction 1: edgewise to upward -
Colour	White (RAL 9001)

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90 °
Busbar trunking polarity	3L + N + PE 3L + PE
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Width	63 mm
Height	147 mm
Length	250...745 Mm for side A 250...745 mm for side B

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Standards	IEC 60439-2 IEC 61439-6

Packing Units

Package 1 Weight	45.000 kg
Package 1 Height	0.640 dm
Package 1 width	8.700 dm
Package 1 Length	8.700 dm