


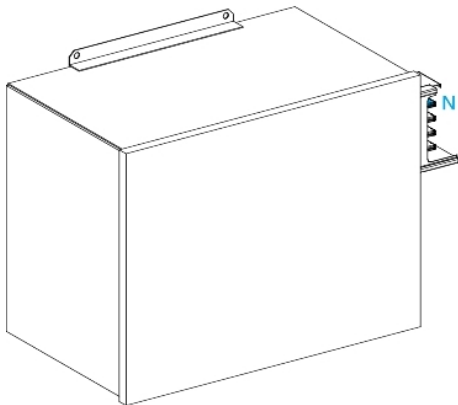

Main

Range of product	Canalis
Product name	KS
Product or component type	Feed unit
BAR MATERIAL	Aluminium
Product compatibility	FL21 gland plate
[Ie] rated operational current	800 A 1000 A
Mounting location	Left
Colour	White (RAL 9001)

Complementary

Protection type	Without protection
[Ue] rated operational voltage	230...690 V
Connections - terminals	Lug for 240 mm ² flexible Lug for 300 mm ² rigid
Control type	Without
Number of circuits	1
Provided equipment	End cover
Mounting mode	By screws
Mounting support	Busbar
Standards	IEC 61439-6 IEC 60439-2
Width	753 mm
Depth	370 mm
Height	500 mm
Body material	Metal
Net weight	24.5 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	29.6 kg
Package 1 Height	40.5 cm
Package 1 width	52.5 cm
Package 1 Length	78 cm
Unit Type of Package 2	PAL
Number of Units in Package 2	1
Package 2 Weight	36 kg
Package 2 Height	55.5 cm
Package 2 width	80 cm
Package 2 Length	60 cm
Unit Type of Package 3	CAR

Number of Units in Package 3	1
Package 3 Weight	36 kg
Package 3 Height	55.5 cm
Package 3 width	80 cm
Package 3 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

