


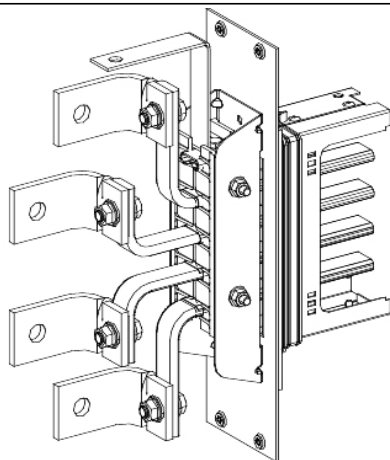

Main

Range of product	Canalis
Product name	KS
Product or component type	Flange feed unit
BAR MATERIAL	Copper
Product compatibility	KS
[Ie] rated operational current	400 A
Mounting location	Right Left
Colour	White (RAL 9001)

Complementary

Protection type	Without protection
[Ue] rated operational voltage	230...690 V
Connections - terminals	Bar
Control type	Without
Number of circuits	1
Provided equipment	End cover
Mounting mode	By screws
Mounting support	Busbar
Standards	IEC 61439-6 IEC 60439-2
Width	279.5 mm
Depth	81 mm
Height	334 mm
Body material	Metal
Net weight	3 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	4 kg
Package 1 Height	8 cm
Package 1 width	30 cm
Package 1 Length	34 cm