


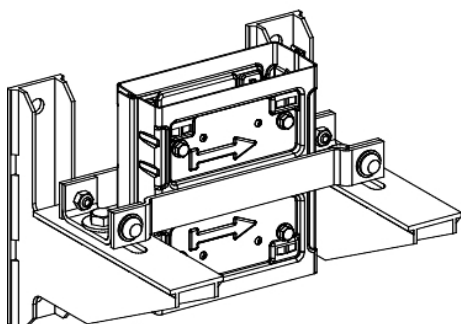

Main

Range of product	Canalis
Product name	KS
Product or component type	Support foot
Product compatibility	KS
Fixing device mounting	Tied at riser 1st joint. unit
Maximum load	680 kg

Complementary

Accessory / separate part category	Fixing accessory
[Ie] rated operational current	250.0 A
Mounting position	Vertical
Width	275 mm
Depth	225.5 mm
Height	200 mm
Net weight	4.5 kg

Environment

Standards	IEC 61439-6 IEC 60439-2
-----------	----------------------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	5.6 kg
Package 1 Height	11.5 cm
Package 1 width	28.5 cm
Package 1 Length	44.5 cm
Unit Type of Package 2	PAL
Number of Units in Package 2	24
Package 2 Weight	176 kg
Package 2 Height	62 cm
Package 2 width	85 cm
Package 2 Length	92 cm

Offer Sustainability

Sustainable offer status	Green Premium product
RECh Regulation	 RECh Declaration
RECh free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes

RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

