


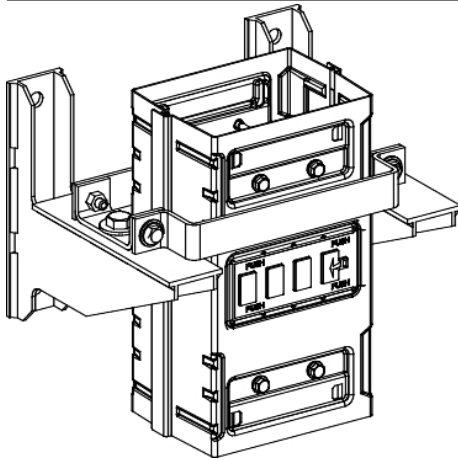

Main

Range of product	Canalis
Product name	KS
Product or component type	Support foot
Product compatibility	KS
Fixing device mounting	Tied at riser 1st joint. unit
Maximum load	1760 kg

Complementary

Accessory / separate part category	Fixing accessory
[Ie] rated operational current	630.0 A
Mounting position	Vertical
Width	275 mm
Depth	225.5 mm
Height	200 mm
Net weight	7 kg

Environment

Standards	IEC 61439-6 IEC 60439-2
-----------	----------------------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	8.143 kg
Package 1 Height	20 cm
Package 1 width	34 cm
Package 1 Length	43 cm
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Weight	55.258 kg
Package 2 Height	75.3 cm
Package 2 width	60 cm
Package 2 Length	80 cm
Unit Type of Package 3	PAL
Number of Units in Package 3	6
Package 3 Weight	55.3 kg
Package 3 Height	60 cm
Package 3 width	75.3 cm
Package 3 Length	80 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

