

### Main

Range of product	Canalis
Product name	KS
Product or component type	Busbar trunking
Busbar description	Distribution length
BAR MATERIAL	Aluminium
Device application	Medium power distribution
[Ie] rated operational current	800 A at 35 °C
Number of tap-off outlets	10

### Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
[Uiimp] rated impulse withstand voltage	8 kV
[Ui] rated insulation voltage	690 V
[Icw] rated short-time withstand current	37.4 kA
[Ipk] rated peak withstand current	78.7 kA
Electrical connection	Lubricated sliding contact
Radiated magnetic field	1.12 µT
Thermal stress limit	1758 kA <sup>2</sup> .s
THDI	0...15 % 800 A 15...33 % 630 A 33...100 % 500 A
Maximum voltage drop	<0.008 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.009 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.009 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.009 V with power factor = 0.7 at 50 Hz with 1A for 100 m long
Mounting mode	By screws
Mounting position	Horizontal
Neutral position	Up
Busbar trunking polarity	3L + N + PE
Dimension type	Fix
Width	146 mm
Depth	113 mm
Length	5 m
Net weight	69.2 kg

### Environment

Standards	IEC 61439-6 IEC 60439-2
-----------	----------------------------

### Packing Units


Package 1 Weight	69.200 kg
Package 1 Height	1.700 dm
Package 1 width	1.200 dm
Package 1 Length	51.375 dm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

## Contractual warranty

Warranty	18 months
----------	-----------

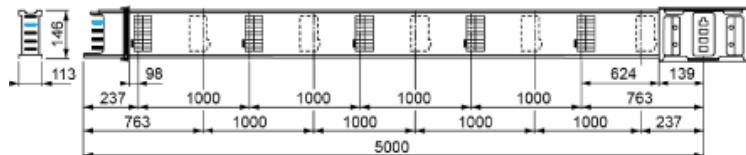

Dimensions		KSA800ED45010
A (mm)	5000	
B (mm)	-	
C (mm)	-	
D (mm)	-	
Fire barrier	No	
Fire barrier position	-	