


KSB32CP

TAP OFF UNIT 32A FOR 2 POWER SOCKETS

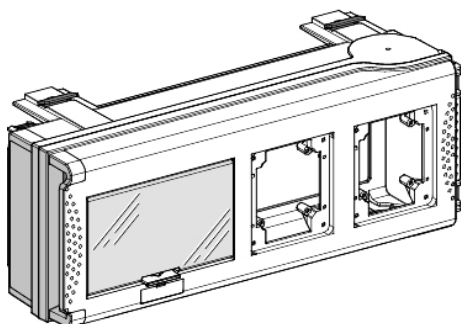

Main

Range of product	Canalis
Product name	KS
Product or component type	Tap-off unit
Product compatibility	Modular device
[Ie] rated operational current	32 A at 35 °C
Tap-off unit socket description	Free choice
Tap-off unit 2nd socket description	Free choice
Tap-off unit polarity	3L+N+PE
Provided equipment	Blanking plate
Colour	White (RAL 9001)

Complementary

Device application	Low power distribution Power socket distribution
[Ue] rated operational voltage	230...690 V depending on protective device
[Uimp] rated impulse withstand voltage	6.8 kV
[Ui] rated insulation voltage	400 V depending on protective device 500 V depending on protective device 690 V depending on protective device
Network frequency	50/60 Hz
Protection type	Without protection
Tap-off unit disconnection mode	By drawing out
Tap-off unit connector type	With phase selection
Standards	IEC 60439-2 IEC 61439-6
Body material	Plastic
Number of 18mm modules	8
Width	437.5 mm
Depth	108 mm
Height	165 mm
Net weight	2.7 kg

Environment

Earthing system	TT - busbar trunking TN-S - busbar trunking TN-C - busbar trunking TT - tap-off unit TN-S - tap-off unit
IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company mentioned herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.55 kg
Package 1 Height	15.9 cm
Package 1 width	17.6 cm
Package 1 Length	43.5 cm
Unit Type of Package 2	P12
Number of Units in Package 2	39
Package 2 Weight	77 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

