


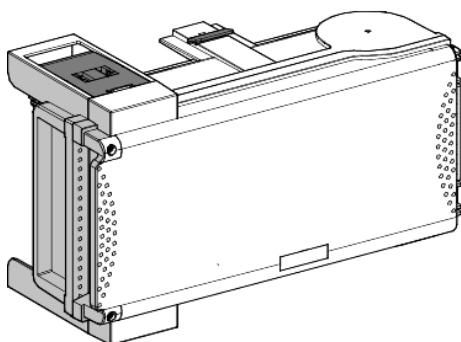

Main

Range of product	Canalis
Product name	KS
Product or component type	Empty tap-off unit
Product compatibility	KS
[Ie] rated operational current	50 A at 35 °C
Tap-off unit polarity	3L+N+PE

Complementary

Device application	Low power distribution
[Ue] rated operational voltage	230...690 V depending on protective device
[Uimp] rated impulse withstand voltage	8 kV
[Ui] rated insulation voltage	690 V depending on protective device
Network frequency	50/60 Hz
Tap-off unit disconnection mode	By drawing out
Tap-off unit connector type	With fixed polarity
Door opening size	432.5 mm
Door opening side	Right
Standards	IEC 60439-2 IEC 61439-6
Body material	Plastic
Colour	White (RAL 9001)
Width	356 mm
Depth	103 mm
Height	202 mm
Net weight	2.2 kg

Environment

Earthing system	TT - busbar trunking TN-S - busbar trunking TN-C - busbar trunking IT - busbar trunking TT - tap-off unit TN-S - tap-off unit IT - tap-off unit
-----------------	---

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.73 kg
Package 1 Height	16 cm
Package 1 width	20.3 cm
Package 1 Length	35.7 cm
Unit Type of Package 2	P12
Number of Units in Package 2	38

Package 2 Weight	94 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

