



Main

|                                    |  |
|------------------------------------|--|
| Range of product                   | Harmony XVB Universal  |
| Product or component type          | Complete beacon  |
| Beacon or indicator bank unit type | Base unit direct or tube fixing<br>Illuminated unit                      |
| Signalling type                    | Steady   |
| Mounting diameter                  | 70 mm  |
| Component name                     | XVBL   |
| Material                           | Glass reinforced polyamide: base unit<br>Polycarbonate: illuminated unit |
| Light source                       | Bulb not included, orange  |
| Bulb type                          | Incandescent with BA 15d base<br>Protected LED                           |
| [Us] rated supply voltage          | <= 250 V   |
| Maximum power dissipation in W     | 7 W  |

Complementary

|  |  |
|--|--|
| Connections - terminals                | Screw clamp terminals, <= 1 x 1.5 mm <sup>2</sup> with cable end |
| [Ui] rated insulation voltage          | 250 V conforming to IEC 60947-1                                  |
| Nominal voltage limit                  | 0.85...1.1 Un conforming to IEC 60947-5-1                        |
| [Uimp] rated impulse withstand voltage | 4 kV IEC 60947-1   |
| CAD overall width                      | 70 mm  |
| CAD overall height                     | 139 mm   |
| CAD overall depth                      | 70 mm  |
| Terminals description ISO n°1          | (COM-1)PW<br>(GND)GROUND   |
| Net weight                             | 0.26 kg  |

Environment

|                                       |  |
|---------------------------------------|--|
| Pollution degree                      | 2  |
| Product certifications                | CCC<br>GOST<br>UL 508<br>CSA C22-2 No 14   |
| Standards                             | EN/IEC 60947-5-1   |
| Protective treatment                  | TC   |
| Ambient air temperature for operation | -25...50 °C: LED<br>-25...70 °C: incandescent  |
| Ambient air temperature for storage   | -40...70 °C  |
| Electrical shock protection class     | Class I on support tube conforming to IEC 61140<br>Class II on base unit conforming to IEC 61140 |
| IP degree of protection               | IP65 on fixing base XVBZ0. conforming to IEC 60529<br>IP66 on base unit conforming to IEC 60529  |
| NEMA degree of protection             | NEMA 4X conforming to UL 508 (indoor)  |

## Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Number of Units in Package 1 | 1       |
| Package 1 Weight             | 264 g   |
| Package 1 Height             | 8.4 cm  |
| Package 1 width              | 14.8 cm |
| Package 1 Length             | 8.3 cm  |

## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           |  <a href="#">REACH Declaration</a>  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes  |
| RoHS exemption information |  Yes  |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>   |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a>  |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins  |

## Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Illuminated Beacon for BA 15d Bulb or LED

---

Dimensions

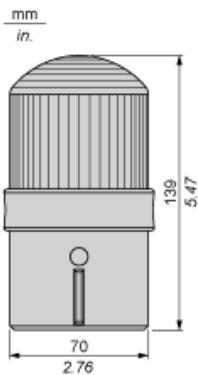

## Illuminated Beacon

## Wiring Diagram

