

# Product data sheet

## Characteristics

### ZB4FW343

Head for illuminated push button, Harmony XB4, flush mounted red flush caps pushbutton integral LED



#### Main

|                                 |   |
|---------------------------------|---|
| Range of product                | Harmony XB4                                 |
| Product or component type       | Head for illuminated push-button            |
| Device short name               | ZB4F  |
| Product compatibility           | Integral LED<br>ZBYF...<br>ZBZF32<br>ZBZF33 |
| Bezel material                  | Chromium plated metal                       |
| Head type                       | Built-in-flush                              |
| Mounting diameter               | 30.5 mm                                     |
| Sale per indivisible quantity   | 1   |
| Shape of signaling unit head    | Round                                       |
| Type of operator                | Spring return                               |
| Operator profile                | Red flush, unmarked                         |
| Operator additional information | With plain lens                             |

#### Complementary

|                                    |  |
|------------------------------------|--|
| CAD overall width                  | 36.6 mm  |
| CAD overall height                 | 36.6 mm  |
| CAD overall depth                  | 31 mm  |
| Net weight                         | 0.06 kg  |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m  |
| Mechanical durability              | 10000000 cycles  |
| Electrical composition code        | M1 for <6 contacts using single blocks in front mounting with integral LED<br>M2 for <6 contacts using single and double blocks in front mounting with integral LED<br>M6 for <2 contacts using single blocks in front mounting with integral LED and transformer<br>M10 for <2 contacts using single blocks in front mounting with integral LED |
| Device presentation                | Basic element  |

#### Environment

|                                       |  |
|---------------------------------------|--|
| Protective treatment                  | TH   |
| Ambient air temperature for storage   | -40...70 °C  |
| Ambient air temperature for operation | -40...70 °C  |
| Overvoltage category                  | Class I conforming to IEC 60536  |
| IP degree of protection               | IP66 conforming to IEC 60529<br>IP67 conforming to IEC 60529<br>IP69 conforming to IEC 60529<br>IP69K conforming to ISO 20653<br>Type 13 conforming to UL 50 E<br>Type 12 conforming to UL 50 E<br>Type 4 conforming to UL 50 E<br>Type 4X conforming to UL 50 E |
| IK degree of protection               | IK06 conforming to EN 50102  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                        |   |
|------------------------|---|
| Standards              | CSA C22.2 No 14<br>EN/IEC 60947-5-1<br>EN/IEC 60947-5-4<br>UL 508<br>EN/IEC 60947-1<br>JIS C8201-5-1<br>CE<br>JIS C8201-1   |
| Product certifications | UL listed<br>CSA<br>CCC<br>EAC  |
| Vibration resistance   | 5 gn (f= 10...500 Hz) conforming to IEC 60068-2-6<br>2 mm peak to peak (f= 2...10 Hz) conforming to IEC 60068-2-6   |
| Shock resistance       | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>25 gn (duration = 6 ms) for 1000 shocks on each axis conforming to IEC 60068-2-27 |

### Packing Units

|                              |        |
|------------------------------|--------|
| Unit Type of Package 1       | PCE    |
| Number of Units in Package 1 | 1      |
| Package 1 Weight             | 60 g   |
| Package 1 Height             | 4.4 cm |
| Package 1 width              | 5.2 cm |
| Package 1 Length             | 5.5 cm |

### Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           |  <a href="#">REACH Declaration</a>  |
| REACH free of SVHC         | Yes  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes  |
| Mercury free               | Yes  |
| RoHS exemption information |  <a href="#">Yes</a>  |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>   |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a>  |
| Circularity Profile        |  <a href="#">End Of Life Information</a>  |


### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

## Dimensions

---

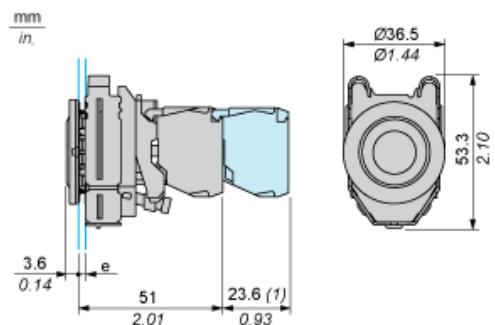

e : clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

(1) : Additional row of contacts

---

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

---

Connection by Screw Clamp Terminals or Plug-in Connectors



(1) : Diameter on finished panel or support


(2) : Ø30.75 mm recommended (Ø30.5  $^{+0.5}_0$ ) / Ø1.21 in. recommended (Ø1.20 in.  $^{+0.0196}_0$ )

| Connections                                 | a in mm | a in in. | b in mm | b in in. |
|---|---------|----------|---------|----------|
| By connectors                               | 50      | 1.97     | 40      | 1.57     |
| By connectors and with legend holder ZBZF32 | 50      | 1.97     | 40      | 1.57     |
| By connectors and with legend holder ZBZF33 | 60      | 2.36     | 40      | 1.57     |

---

Electrical Composition Corresponding to Codes M1 and M7


---



---

Electrical Composition Corresponding to Codes M2 and M8

---



---

Electrical Composition Corresponding to Codes M6 and P2

---



---

Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2

---



---

Legend

---

Single contact



Double contact



Light block



Possible location

