



Main

Range of product	Harmony XB4 Harmony XB5
Product or component type	Blanking plug
Accessory / separate part category	Mounting and fixing accessory
Product compatibility	XB5F ZB5F

Complementary

Head type	Built-in-flush
Colour	Dark grey
Device application	Industrial machines
IP degree of protection	IP66 (front face) conforming to IEC 60529 IP69 conforming to IEC 60529 IP69K conforming to DIN 40050-9
IK degree of protection	IK03 conforming to IEC 50102
Mounting diameter	30.5 mm
Quantity per set	Set of 5


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	15 g
Package 1 Height	3 cm
Package 1 width	3.6 cm
Package 1 Length	3.6 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Weight	93 g
Package 2 Height	8.7 cm
Package 2 width	7 cm
Package 2 Length	7 cm
Unit Type of Package 3	S03
Number of Units in Package 3	225
Package 3 Weight	4.683 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information

Dimensions

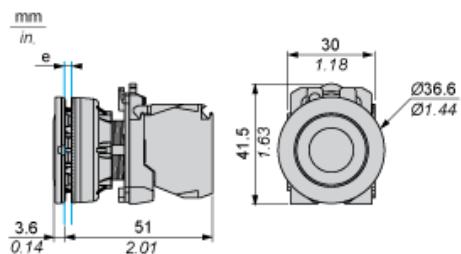

e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors



(1) Diameter on finished panel or support

(2) Ø30.75 mm recommended ($\text{Ø}30.5 \text{ mm}^{+0.5}$) / Ø1.21 in. recommended ($\text{Ø}1.20 \text{ in.}^{+0.0196}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	40	1.57
By Faston connectors	45	1.77	40	1.57