


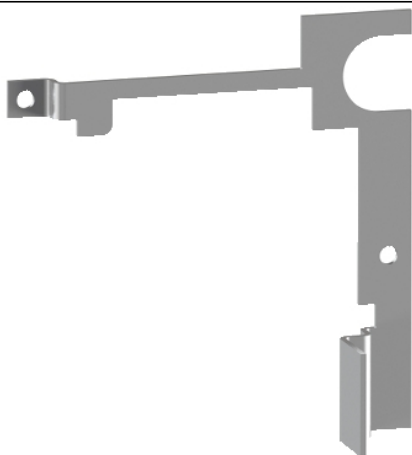

Main

Range	Masterpact
Product or component type	Ethernet interface module Accessory kit
Device application	Communication
Range compatibility	Masterpact MTZ2 circuit breaker Masterpact MTZ3 circuit breaker
Device mounting	Direct mounting

Complementary

Communication gateway	Ethernet TCP/IP to Modbus
Communication network type	ULP, CANopen on USB Ethernet, Ethernet TCP/IP10/100 Mbps on RJ45
Mounting mode	Drawout
Mounting support	DIN rail
Localisation on device	Chassis
Maximum supply current	3 A
Power consumption in W	72 W
Height	51 mm
Width	51 mm
Depth	52.5 mm
Net weight	0.075 kg
Provided equipment	1 instruction sheet
Offer type	Spare part

Environment

Ambient air temperature for operation	-20...70 °C
---------------------------------------	-------------

Packing Units

Package 1 Weight	0.165 kg
Package 1 Height	10.000 cm
Package 1 width	8.400 cm
Package 1 Length	11.200 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration

Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information