

### Main

|                                                          |                                            |
|----------------------------------------------------------|--------------------------------------------|
| Range                                                    | Lineryg                                    |
| Product name                                             | FT                                         |
| Device short name                                        | GV3G                                       |
| Product or component type                                | Comb busbar                                |
| Accessory / separate part category                       | Connection accessory                       |
| Poles description                                        | 3P                                         |
| Range compatibility                                      | TeSys D<br>TeSys K<br>TeSys U<br>TeSys GV3 |
| Product compatibility                                    | GV3P<br>LC1D40A...D65A<br>GV3L             |
| Number of tap-offs                                       | 2                                          |
| [I <sub>th</sub> ] conventional free air thermal current | 115 A                                      |
| Connection pitch                                         | 64 mm                                      |

### Complementary

|                                            |             |
|--------------------------------------------|-------------|
| Mounting location                          | On terminal |
| [U <sub>i</sub> ] rated insulation voltage | 690 V       |
| Net weight                                 | 0.15 kg     |

### Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.156 kg |
| Package 1 Height | 0.300 dm |
| Package 1 width  | 0.500 dm |
| Package 1 Length | 1.200 dm |


### Offer Sustainability

|                            |                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                             |
| REACH Regulation           |  <a href="#">REACH Declaration</a>             |
| EU RoHS Directive          | Compliant  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                                                               |
| Mercury free               | Yes                                                                                                                               |
| RoHS exemption information |  Yes                                           |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>        |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a> |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins       |


### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Mounting of External Operator GV3APN01, GV3APN02 or GV3APN04 for Motor Circuit Breakers GV3L

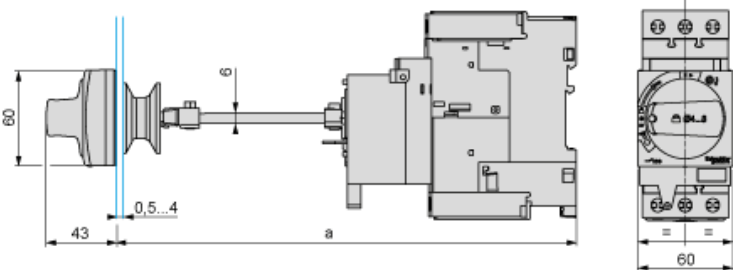


Door cut-out




(1) For IP65 only.

Mounting of External Operator GVAPH03 for Motor Circuit Breakers GV3L

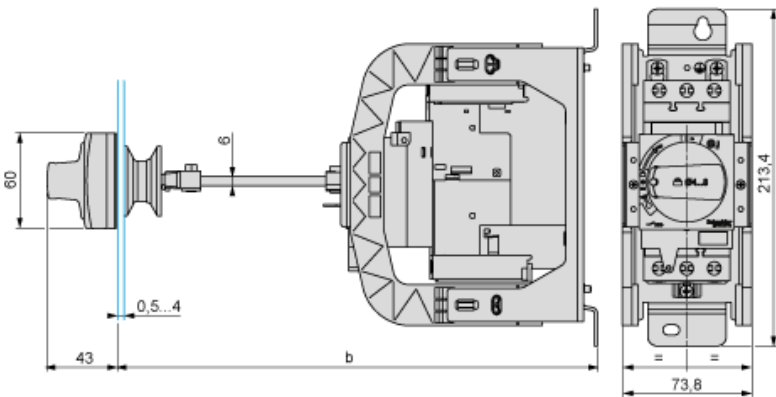

|                              | b       |         |
|------------------------------|---------|---------|
|                              | Minimum | Maximum |
| GV3APN.. + GVAPH03           | 200     | 300     |
| GV3APN.. + GVAPH03 + GVAPK12 | 300     | 492     |

Door cut-out



(1) For IP65 only.