


Product data sheet

Characteristics

M9XUP106

Multi9 - comb busbar - 1L - 18 mm pitch - 6 modules - 115A

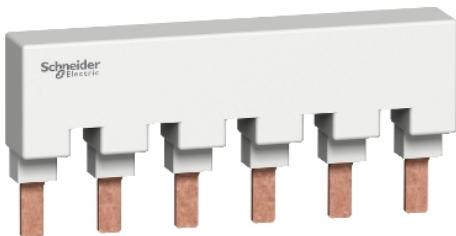

Main

Range	Multi 9
Product or component type	Comb busbar
Accessory / separate part category	Connection accessory
Lines description	1L
Length in 18 mm modules	6

Complementary

Number of ways	6 ways 1 L
Poles configuration for 1 way	1 x 1P
Connection pitch	18 mm
Connector type	Tooth
Distance between way	18 mm
Insulation	Insulated
Device presentation	Uncuttable
[Ie] rated operational current	115 A at 40 °C
[Ue] rated operational voltage	480 V AC 50/60 Hz Ph/Ph 277 V AC 50/60 Hz Ph/N
[Ui] rated insulation voltage	1000 V AC 50/60 Hz conforming to UL 508
Mounting mode	Horizontal
Mounting location	Top on tunnel type terminals
9 mm pitches	12
Width	108 mm
Colour	Light grey (RAL 7035)
Range compatibility	Multi 9 C60BP

Environment

Standards	UL 508
Fire resistance	960 °C (30 s) conforming to IEC 60695-2-1
Pollution degree	3
IP degree of protection	IP20 with end-pieces and tooth covers

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	67 g
Package 1 Height	2 cm
Package 1 width	5.1 cm
Package 1 Length	10 cm
Unit Type of Package 2	S03
Number of Units in Package 2	100
Package 2 Weight	7.195 kg

Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins