


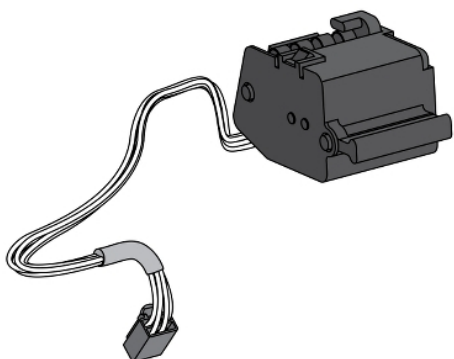

Main

Range	Masterpact
Device short name	OF
Product or component type	Auxiliary contact
Device application	Control
Range compatibility	Masterpact MTZ1 circuit breaker

Complementary

Auxiliary contacts type	Low level
Signal contacts composition	1 NO/NC
Mounting mode	Fixed
Breaking capacity	5 A AC-12 240/380 V AC 50/60 Hz 5 A AC-12 480 V AC 50/60 Hz 5 A AC-12 690 V AC 50/60 Hz 5 A DC-12 250 V DC 2.5 A DC-12 250 V DC 0.5 A DC-12 48 V DC 0.3 A DC-12 24 V DC
Minimum load	2 mA at 15 V

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins