


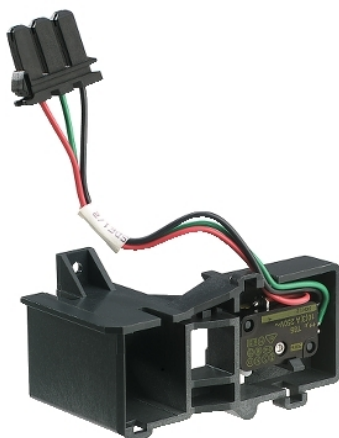

Main

Range	Masterpact
Device short name	SDE
Product or component type	Auxiliary contact
Device application	Control
Range compatibility	Masterpact MTZ2 circuit breaker Masterpact MTZ3 circuit breaker

Complementary

Auxiliary contacts type	Standard
Signal contacts composition	1 NO/NC
[I _{th}] conventional free air thermal current	6 A
Breaking capacity	6 A AC-12 240/380 V AC 50/60 Hz 2 A AC-12 480 V AC 50/60 Hz 3 A DC-12 24/48 V DC 0.3 A DC-12 125 V DC 0.15 A DC-12 250 V DC
Minimum load	100 mA at 24 V
Provided equipment	1 instruction sheet
Offer type	Spare part

Packing Units

Package 1 Weight	0.102 kg
Package 1 Height	4.000 cm
Package 1 width	5.500 cm
Package 1 Length	10.000 cm

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration