


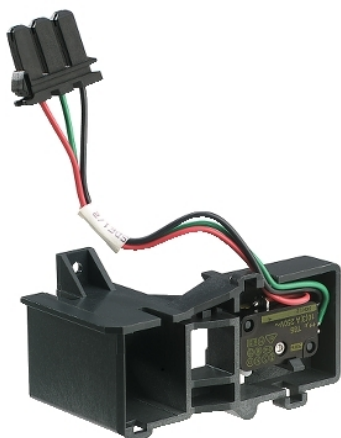

Main

Range	Masterpact
Device short name	SDE
Product or component type	Auxiliary contact
Device application	Control
Range compatibility	Masterpact MTZ2 circuit breaker Masterpact MTZ3 circuit breaker

Complementary

Auxiliary contacts type	Low level
Signal contacts composition	1 NO/NC
Breaking capacity	3 A DC-12 24/48 V DC 0.3 A DC-12 125 V DC 0.15 A DC-12 250 V DC 3 A AC-12 24/48 V AC 50/60 Hz 3 A AC-12 240 V AC 50/60 Hz 3 A AC-12 380 V AC 50/60 Hz
Minimum load	2 mA at 15 V
Provided equipment	1 instruction sheet
Offer type	Spare part

Packing Units

Package 1 Weight	0.101 kg
Package 1 Height	3.500 cm
Package 1 width	5.000 cm
Package 1 Length	8.700 cm

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration