


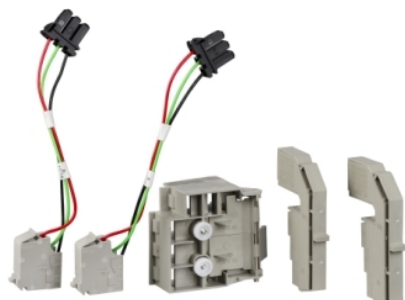

Main

Product or component type	Auxiliary contact
Range compatibility	ComPact NS630b...1600
Signal contacts composition	1 NO/NC

Complementary

Auxiliary contacts type	Standard
Auxiliary contacts operation	Early-make
Mounting mode	Clip-on
[I _{th}] conventional free air thermal current	6 A
Minimum load	100 mA at 24 V DC
[I _e] rated operational current	AC-12: 6 A at 24 V AC 50/60 Hz AC-12: 6 A at 48 V AC 50/60 Hz AC-12: 6 A at 110 V AC 50/60 Hz AC-12: 6 A at 220/240 V AC 50/60 Hz AC-12: 6 A at 380/440 V AC 50/60 Hz AC-12: 6 A at 480 V AC 50/60 Hz AC-12: 6 A at 660/690 V AC 50/60 Hz AC-15: 6 A at 24 V AC 50/60 Hz AC-15: 6 A at 48 V AC 50/60 Hz AC-15: 5 A at 110 V AC 50/60 Hz AC-15: 4 A at 220/240 V AC 50/60 Hz AC-15: 2 A at 380/440 V AC 50/60 Hz AC-15: 1.5 A at 480 V AC 50/60 Hz AC-15: 0.1 A at 660/690 V AC 50/60 Hz DC-12: 6 A at 24 V DC DC-12: 2.5 A at 48 V DC DC-12: 0.6 A at 110 V DC DC-12: 0.3 A at 250 V DC DC-14: 1 A at 24 V DC DC-14: 0.2 A at 48 V DC DC-14: 0.05 A at 110 V DC DC-14: 0.03 A at 250 V DC

Packing Units

Package 1 Weight	0.094 kg
Package 1 Height	5.000 cm
Package 1 width	11.000 cm
Package 1 Length	18.000 cm

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes

RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------