


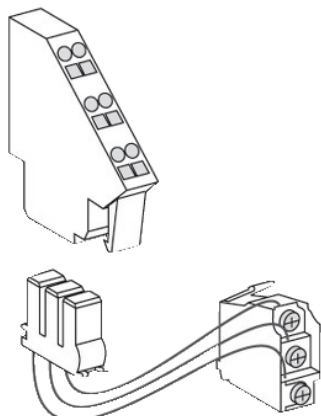

Main

Product or component type	Auxiliary contact
Device short name	OF
Range compatibility	MasterPact NT
Signal contacts composition	1 NO/NC

Complementary

Auxiliary contacts type	Low level
Mounting mode	Fixed
[I _e] rated operational current	DC-12: 5 A at 24 V DC DC-12: 0.3 A at 250 V DC-12: 0.5 A at 125 V DC
Minimum load	2 mA at 15 V

Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------