


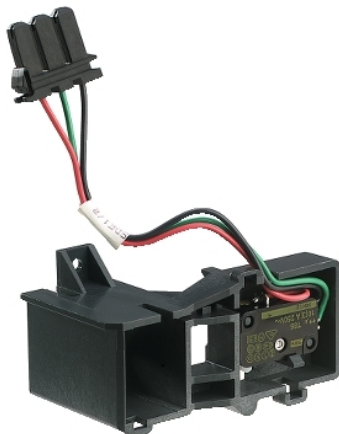

Main

Product or component type	Auxiliary contact
Device short name	SDE
Range compatibility	MasterPact NT
Signal contacts composition	1 NO/NC

Complementary

Auxiliary contacts type	Standard
Mounting mode	Drawout
[I _{th}] conventional free air thermal current	5 A
[I _e] rated operational current	DC-12: 0.15 A at 250 V DC DC-12: 3 A at 24/48 V DC DC-12: 0.3 A at 125 V DC
Minimum load	100 mA at 24 V

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------