


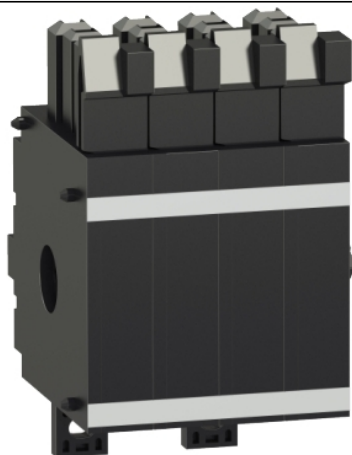

Main

Product or component type	Auxiliary contact
Device short name	4 OF
Range compatibility	Masterpact NW
Signal contacts composition	4 NO/NC

Complementary

Auxiliary contacts type	Standard Low level
Mounting mode	Drawout
[I _e] rated operational current	AC-12: 10 A at 240/380 V AC 50/60 Hz (standard) AC-12: 10 A at 480 V AC 50/60 Hz (standard) AC-12: 3 A at 380 V AC 50/60 Hz (low level) AC-12: 6 A at 24/48 V AC 50/60 Hz (low level) AC-12: 6 A at 240 V AC 50/60 Hz (low level) AC-12: 6 A at 690 V AC 50/60 Hz (standard) DC-12: 10 A at 125 V DC (standard) DC-12: 10 A at 24/48 V DC (standard) DC-12: 3 A at 250 V DC (low level) DC-12: 3 A at 250 V DC (standard) DC-12: 6 A at 125 V DC (low level) DC-12: 6 A at 24/48 V DC (low level)
Minimum load	100 mA at 24 V 2 mA at 15 V

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------