


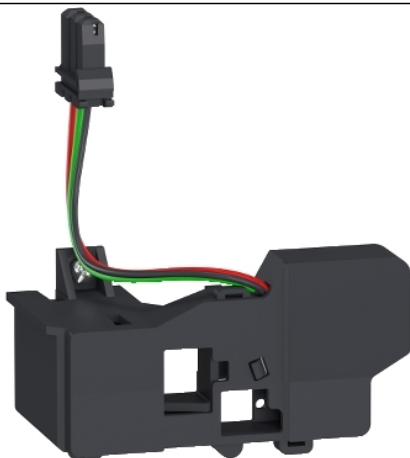

Main

Range	Masterpact
Device short name	SDE
Device application	Control
Range compatibility	Masterpact MTZ2 circuit breaker Masterpact MTZ3 circuit breaker

Complementary

Auxiliary contacts type	Standard
Signal contacts composition	1 NO/NC
Mounting mode	Drawout
[I _{th}] conventional free air thermal current	5 A
Breaking capacity	6 A AC-12 240/380 V AC 50/60 Hz 2 A AC-12 480 V AC 50/60 Hz 3 A DC-12 24/48 V DC 0.3 A DC-12 125 V DC 0.15 A DC-12 250 V DC
Minimum load	100 mA at 24 V

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration