


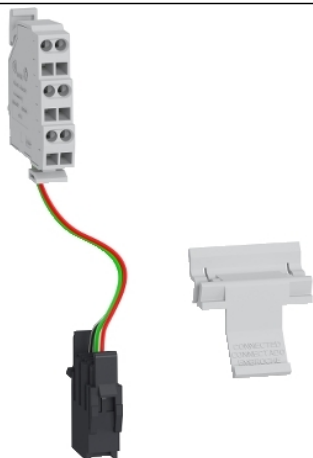

Main

Range	Masterpact
Device short name	EF
Product or component type	Auxiliary contact
Device application	Control
Range compatibility	Masterpact MTZ2 circuit breaker Masterpact MTZ3 circuit breaker
Signal contacts composition	1 NO/NC

Complementary

Auxiliary contacts type	Standard
Auxiliary contacts operation	Connected position
Mounting mode	Drawout
[I _e] rated operational current	AC-12: 6 A at 690 V AC 50/60 Hz DC-12: 0.3 A at 250 V DC DC-12: 0.8 A at 125 V DC DC-12: 2.5 A at 24/48 V DC AC-12: 6 A at 240/380 V AC 50/60 Hz AC-12: 6 A at 480 V AC 50/60 Hz
Minimum load	100 mA at 24 V

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration