


# Product data sheet

## Characteristics

# KRB0010CR4

Protective cover with bellow, Canalis KR, for feed unit connection, KRA 800/1250A, KRC 1000/1600A, made to measure, IP55

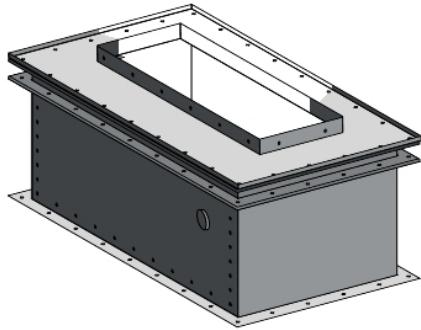

### Main

Range	Canalis
Product name	KR
Product or component type	Protective cover
Device short name	KRB
Range compatibility	Canalis KR
Accessory / separate part category	Protection accessory
Material	Stainless steel 316
[Ie] rated operational current	800 A with aluminium 1000 A with aluminium 1250 A with aluminium 1000 A with copper 1350 A with copper 1600 A with copper

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	55.0 cm
Package 1 Width	40.0 cm
Package 1 Length	50.0 cm
Package 1 Weight	40.29 kg

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<input checked="" type="checkbox"/> <a href="#">China RoHS Declaration</a>
RoHS exemption information	<input checked="" type="checkbox"/> Yes
Environmental Disclosure	<input checked="" type="checkbox"/> <a href="#">Product Environmental Profile</a>
Circularity Profile	<input checked="" type="checkbox"/> <a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.