


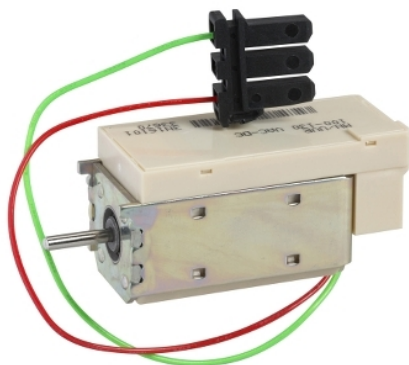

Main

Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT ComPact NS630b...1600
Voltage release type	Shunt trip release
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC

Complementary

Threshold tripping voltage	0.7...1.1 x Un
Supply holding power	4.5 VA
Mounting mode	Drawout
Response time	50 ms (Compact NS630b...1600) 55 ms (Masterpact NT)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------