

# BSH1001P21F2A

AC servo motor BSH, Lexium 05, 2.7N.m,  
3000rpm, untapped shaft, with brake, IP65





## Main

Product or component type	Servo motor
Device short name	BSH
Maximum mechanical speed	6000 rpm
Continuous stall torque	<p>3.39 N.M for LXM15LD21M3, 230 V, single phase</p> <p>2.7 N.M for LXM15LD10N4, 230 V, three phase</p> <p>3.39 N.M for LXM15LD10N4, 400 V, three phase</p> <p>3.39 N.M for LXM15LD10N4, 480 V, three phase</p> <p>3.39 N.M for LXM15LD21M3, 230 V, three phase</p> <p>3.39 N.M for LXM15LD17N4, 230 V, three phase</p> <p>3.39 N.M for LXM15LD17N4, 400 V, three phase</p> <p>3.39 N.M for LXM15LD17N4, 480 V, three phase</p> <p>3.4 N.M for LXM05AD17M3X, 200...240 V, three phase</p> <p>3.4 N.M for LXM05AD22N4, 380...480 V, three phase</p> <p>3.4 N.M for LXM05BD17M3X, 200...240 V, three phase</p> <p>3.4 N.M for LXM05BD22N4, 380...480 V, three phase</p> <p>3.4 N.M for LXM05CD17M3X, 200...240 V, three phase</p> <p>3.4 N.M for LXM05CD22N4, 380...480 V, three phase</p> <p>3.3 N.M for LXM32.D18N4 at 6 A, 400 V, three phase</p> <p>3.3 N.m for LXM32.D18N4 at 6 A, 480 V, three phase</p>
Peak stall torque	<p>7.08 N.M for LXM15LD21M3, 230 V, single phase</p> <p>6.19 N.M for LXM15LD10N4, 230 V, three phase</p> <p>6.19 N.M for LXM15LD10N4, 400 V, three phase</p> <p>6.19 N.M for LXM15LD10N4, 480 V, three phase</p> <p>7.08 N.M for LXM15LD21M3, 230 V, three phase</p> <p>7.08 N.M for LXM15LD17N4, 230 V, three phase</p> <p>7.08 N.M for LXM15LD17N4, 400 V, three phase</p> <p>7.08 N.M for LXM15LD17N4, 480 V, three phase</p> <p>7.1 N.M for LXM05AD17M3X, 200...240 V, three phase</p> <p>7.1 N.M for LXM05AD22N4, 380...480 V, three phase</p> <p>7.1 N.M for LXM05BD17M3X, 200...240 V, three phase</p> <p>7.1 N.M for LXM05BD22N4, 380...480 V, three phase</p> <p>7.1 N.M for LXM05CD17M3X, 200...240 V, three phase</p> <p>7.1 N.M for LXM05CD22N4, 380...480 V, three phase</p> <p>9.6 N.M for LXM32.D18N4 at 6 A, 400 V, three phase</p> <p>9.6 N.m for LXM32.D18N4 at 6 A, 480 V, three phase</p>
Nominal output power	<p>1300 W for LXM15LD17N4, 400 V, three phase</p> <p>1500 W for LXM15LD10N4, 480 V, three phase</p> <p>950 W for LXM15LD21M3, 230 V, single phase</p> <p>1300 W for LXM15LD10N4, 400 V, three phase</p> <p>1500 W for LXM15LD17N4, 480 V, three phase</p> <p>500 W for LXM05AD17M3X, 200...240 V, three phase</p> <p>500 W for LXM05BD17M3X, 200...240 V, three phase</p> <p>500 W for LXM05CD17M3X, 200...240 V, three phase</p> <p>850 W for LXM15LD10N4, 230 V, three phase</p> <p>900 W for LXM05AD22N4, 380...480 V, three phase</p> <p>900 W for LXM05BD22N4, 380...480 V, three phase</p> <p>900 W for LXM05CD22N4, 380...480 V, three phase</p> <p>950 W for LXM15LD17N4, 230 V, three phase</p> <p>950 W for LXM15LD21M3, 230 V, three phase</p> <p>1100 W for LXM32.D18N4 at 6 A, 400 V, three phase</p> <p>1100 W for LXM32.D18N4 at 6 A, 480 V, three phase</p>

Nominal torque	<p>3 N.M for LXM15LD21M3, 230 V, single phase</p> <p>2.5 N.M for LXM15LD10N4, 480 V, three phase</p> <p>2.5 N.M for LXM15LD17N4, 480 V, three phase</p> <p>2.7 N.M for LXM15LD10N4, 230 V, three phase</p> <p>2.7 N.M for LXM15LD10N4, 400 V, three phase</p> <p>2.7 N.M for LXM15LD17N4, 400 V, three phase</p> <p>2.92 N.M for LXM05AD22N4, 380...480 V, three phase</p> <p>2.92 N.M for LXM05BD22N4, 380...480 V, three phase</p> <p>2.92 N.M for LXM05CD22N4, 380...480 V, three phase</p> <p>3 N.M for LXM15LD17N4, 230 V, three phase</p> <p>3 N.M for LXM15LD21M3, 230 V, three phase</p> <p>3.16 N.M for LXM05AD17M3X, 200...240 V, three phase</p> <p>3.16 N.M for LXM05BD17M3X, 200...240 V, three phase</p> <p>3.16 N.M for LXM05CD17M3X, 200...240 V, three phase</p> <p>2.7 N.M for LXM32.D18N4 at 6 A, 400 V, three phase</p> <p>2.7 N.m for LXM32.D18N4 at 6 A, 480 V, three phase</p>
Nominal speed	<p>3000 rpm for LXM15LD10N4, 230 V, three phase</p> <p>3000 rpm for LXM15LD21M3, 230 V, single phase</p> <p>3000 rpm for LXM05AD22N4, 380...480 V, three phase</p> <p>3000 rpm for LXM05BD22N4, 380...480 V, three phase</p> <p>3000 rpm for LXM05CD22N4, 380...480 V, three phase</p> <p>3000 rpm for LXM15LD17N4, 230 V, three phase</p> <p>3000 rpm for LXM15LD21M3, 230 V, three phase</p> <p>1500 rpm for LXM05AD17M3X, 200...240 V, three phase</p> <p>1500 rpm for LXM05BD17M3X, 200...240 V, three phase</p> <p>1500 rpm for LXM05CD17M3X, 200...240 V, three phase</p> <p>4500 rpm for LXM15LD10N4, 400 V, three phase</p> <p>4500 rpm for LXM15LD17N4, 400 V, three phase</p> <p>6000 rpm for LXM15LD10N4, 480 V, three phase</p> <p>6000 rpm for LXM15LD17N4, 480 V, three phase</p> <p>4000 rpm for LXM32.D18N4 at 6 A, 400 V, three phase</p> <p>4000 rpm for LXM32.D18N4 at 6 A, 480 V, three phase</p>
Product compatibility	<p>LXM15LD21M3 at 230 V single phase</p> <p>LXM15LD10N4 at 400 V three phase</p> <p>LXM05AD17M3X at 200...240 V three phase</p> <p>LXM05BD17M3X at 200...240 V three phase</p> <p>LXM05CD17M3X at 200...240 V three phase</p> <p>LXM15LD10N4 at 230 V three phase</p> <p>LXM15LD10N4 at 480 V three phase</p> <p>LXM15LD21M3 at 230 V three phase</p> <p>LXM15LD17N4 at 230 V three phase</p> <p>LXM05AD22N4 at 380...480 V three phase</p> <p>LXM05BD22N4 at 380...480 V three phase</p> <p>LXM05CD22N4 at 380...480 V three phase</p> <p>LXM15LD17N4 at 400 V three phase</p> <p>LXM15LD17N4 at 480 V three phase</p> <p>LXM32.D18N4 at 400 V three phase</p> <p>LXM32.D18N4 at 480 V three phase</p>
Shaft end	Untapped
IP degree of protection	<p>IP65 standard</p> <p>IP67 with IP67 kit</p>
Speed feedback resolution	131072 points/turn
Holding brake	With
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors

## Complementary

Range compatibility	Lexium 15 Lexium 05 Lexium 32
Supply voltage max	480 V
Network number of phases	Three phase
Continuous stall current	3.5 A
Maximum continuous power	1.6 W
Maximum current Irms	12 A for LXM15LD21M3 12 A for LXM15LD10N4 12 A for LXM15LD17N4 12 A for LXM05AD17M3X 12 A for LXM05AD22N4 12 A for LXM05BD17M3X 12 A for LXM05BD22N4 12 A for LXM05CD17M3X 12 A for LXM05CD22N4 12 A for LXM32.D18N4
Maximum permanent current	12 A
Switching frequency	8 kHz
Second shaft	Without second shaft end
Shaft diameter	19 mm
Shaft length	40 mm
Feedback type	Single turn SinCos Hiperface
Holding torque	9 N.m holding brake
Motor flange size	100 mm
Number of motor stacks	1
Torque constant	0.89 N.m/A at 120 °C
Back emf constant	60 V/krpm at 120 °C
Number of motor poles	8
Rotor inertia	2.018 kg.cm <sup>2</sup>
Stator resistance	3.8 Ohm at 20 °C
Stator inductance	17.6 mH at 20 °C
Stator electrical time constant	4.63 ms at 20 °C
Maximum radial force Fr	530 N at 5000 rpm 570 N at 4000 rpm 630 N at 3000 rpm 720 N at 2000 rpm 900 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Brake pull-in power	18 W
Type of cooling	Natural convection
Length	199.5 mm
Centring collar diameter	95 mm
Centring collar depth	3.5 mm
Number of mounting holes	4
Mounting holes diameter	9 mm
Circle diameter of the mounting holes	115 mm
Net weight	4.8 kg

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.4 cm
Package 1 Width	16.3 cm
Package 1 Length	40.7 cm
Package 1 Weight	4.95 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------




---

400 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32-D18N4 servo drive

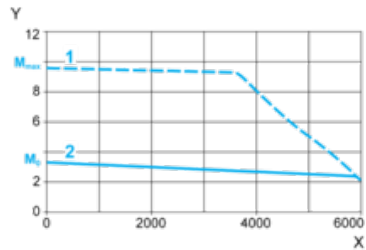

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque


---

480 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32-D18N4 servo drive

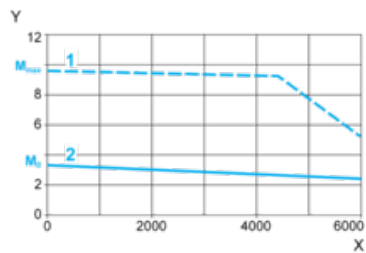

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque