

# BSH1404P11A2P

servo motor BSH, Lexium 32, 32.1N.m,  
3000rpm, 140mm, keyed shaft, Sincos single  
turn, without brake, IP50





## Main

|                           |   |
|---------------------------|---|
| Product or component type | Servo motor   |
| Device short name         | B5H   |
| Maximum mechanical speed  | 4000 rpm  |
| Continuous stall torque   | 33.4 N.M for LXM32.D72N4 at 24 A, 400 V, three phase<br>33.4 N.M for LXM32.D72N4 at 24 A, 480 V, three phase<br>32.1 N.M for LXM05AD57N4, 380...480 V, three phase<br>32.1 N.M for LXM05BD57N4, 380...480 V, three phase<br>32.1 N.m for LXM05CD57N4, 380...480 V, three phase      |
| Peak stall torque         | 103.6 N.M for LXM32.D72N4 at 24 A, 400 V, three phase<br>103.6 N.M for LXM32.D72N4 at 24 A, 480 V, three phase<br>63.09 N.M for LXM05AD57N4, 380...480 V, three phase<br>63.09 N.M for LXM05BD57N4, 380...480 V, three phase<br>63.09 N.m for LXM05CD57N4, 380...480 V, three phase |
| Nominal output power      | 5000 W for LXM32.D72N4 at 24 A, 400 V, three phase<br>5000 W for LXM32.D72N4 at 24 A, 480 V, three phase<br>3400 W for LXM05AD57N4, 380...480 V, three phase<br>3400 W for LXM05BD57N4, 380...480 V, three phase<br>3400 W for LXM05CD57N4, 380...480 V, three phase                |
| Nominal torque            | 19 N.M for LXM32.D72N4 at 24 A, 400 V, three phase<br>19 N.M for LXM32.D72N4 at 24 A, 480 V, three phase<br>10.8 N.M for LXM05AD57N4, 380...480 V, three phase<br>10.8 N.M for LXM05BD57N4, 380...480 V, three phase<br>10.8 N.m for LXM05CD57N4, 380...480 V, three phase          |
| Nominal speed             | 2500 rpm for LXM32.D72N4 at 24 A, 400 V, three phase<br>2500 rpm for LXM32.D72N4 at 24 A, 480 V, three phase<br>3000 rpm for LXM05AD57N4, 380...480 V, three phase<br>3000 rpm for LXM05BD57N4, 380...480 V, three phase<br>3000 rpm for LXM05CD57N4, 380...480 V, three phase      |
| Product compatibility     | LXM05AD57N4 at 380...480 V three phase<br>LXM05BD57N4 at 380...480 V three phase<br>LXM05CD57N4 at 380...480 V three phase<br>LXM32.D72N4 at 400 V three phase<br>LXM32.D72N4 at 480 V three phase  |
| Shaft end                 | Keyed   |
| IP degree of protection   | IP50 standard   |
| Speed feedback resolution | 131072 points/turn  |
| Holding brake             | Without   |
| Mounting support          | International standard flange   |
| Electrical connection     | Rotatable right-angled connectors   |

## Complementary

|                                       |  |
|---------------------------------------|--|
| Range compatibility                   | Lexium 05<br>Lexium 32   |
| Supply voltage max                    | 480 V  |
| Network number of phases              | Three phase  |
| Continuous stall current              | 21.3 A   |
| Maximum continuous power              | 4.33 W   |
| Maximum current Irms                  | 72 A for LXM32.D72N4<br>95.6 A for LXM05AD57N4<br>95.6 A for LXM05BD57N4<br>95.6 A for LXM05CD57N4 |
| Maximum permanent current             | 95.6 A   |
| Switching frequency                   | 8 kHz  |
| Second shaft                          | Without second shaft end   |
| Shaft diameter                        | 24 mm  |
| Shaft length                          | 50 mm  |
| Key width                             | 40 mm  |
| Feedback type                         | Single turn SinCos Hiperface   |
| Motor flange size                     | 140 mm   |
| Number of motor stacks                | 4  |
| Torque constant                       | 1.57 N.m/A at 120 °C   |
| Back emf constant                     | 104 V/krpm at 120 °C   |
| Number of motor poles                 | 10   |
| Rotor inertia                         | 23.7 kg.cm <sup>2</sup>  |
| Stator resistance                     | 0.28 Ohm at 20 °C  |
| Stator inductance                     | 3.9 mH at 20 °C  |
| Stator electrical time constant       | 13.93 ms at 20 °C  |
| Maximum radial force Fr               | 1840 N at 3000 rpm<br>2110 N at 2000 rpm<br>2660 N at 1000 rpm                                     |
| Maximum axial force Fa                | 0.2 x Fr   |
| Type of cooling                       | Natural convection   |
| Length                                | 382.5 mm   |
| Centring collar diameter              | 130 mm   |
| Centring collar depth                 | 3.5 mm   |
| Number of mounting holes              | 4  |
| Mounting holes diameter               | 11 mm  |
| Circle diameter of the mounting holes | 165 mm   |
| Net weight                            | 26 kg  |

## Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Number of Units in Package 1 | 1       |
| Package 1 Height             | 27.0 cm |
| Package 1 Width              | 27.0 cm |
| Package 1 Length             | 60.6 cm |
| Package 1 Weight             | 18.5 kg |

## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           |  <a href="#">REACH Declaration</a>      |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)   |
| Mercury free               | Yes  |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a> |
| RoHS exemption information |  Yes                                    |


|                          |   |
|--------------------------|---|
| Environmental Disclosure | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile      | No need of specific recycling operations  |
| WEEE                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free                 | Yes   |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Servo Motors Dimensions

Example with Straight Connectors

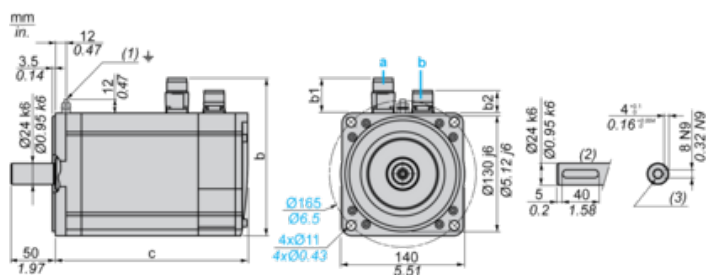

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)
- (3) For screws M8 x 19 mm/M8 x 0.75 in.

Dimensions in mm

| Straight connectors |    |      | Rotatable angled connectors |    |      | c (without brake) | c (with brake) |
|---------------------|----|------|-----------------------------|----|------|-------------------|----------------|
| b                   | b1 | b2   | b                           | b1 | b2   |                   |                |
| 192.5               | 54 | 25.5 | 198.5                       | 60 | 39.5 | 383               | 421            |

Dimensions in in.

| Straight connectors |      |      | Rotatable angled connectors |      |      | c (without brake) | c (with brake) |
|---------------------|------|------|-----------------------------|------|------|-------------------|----------------|
| b                   | b1   | b2   | b                           | b1   | b2   |                   |                |
| 7.57                | 2.12 | 1.00 | 7.81                        | 2.36 | 1.55 | 15.07             | 16.57          |


---

400 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32•D72N4 servo drive

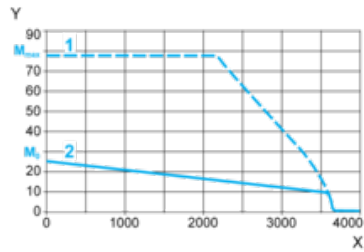

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque


---

480 V 3-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32•D72N4 servo drive

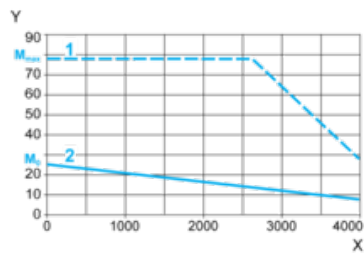

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque