

HMIG5U21

base unit, Harmony GTU, Open BOX Windows 10, Universal Panel, without HMI software installed



Main

Range of product	Harmony GTU
Product or component type	Base unit
Device short name	Open Box
Range compatibility	Harmony GTU
[Us] rated supply voltage	12...24 V DC power supply

Complementary

Integrated connection type	Ethernet TCP/IP with 2 RJ45 COM1 serial link RJ45 RS485, transmission rate: 110...115200 bit/s COM2 serial link SUB-D 9 RS232C/RS422/RS485, transmission rate: 110...115200 bit/s Auxiliary port terminal block USB 2.0 port mini B USB DVI-D video port DVI-D Microphone mini-jack USB 2.0 port with 3 USB type A
Communication port protocol	Modbus Modbus TCP/IP Uni-Telway
Operating system	Windows 10 IoT Enterprise 32bit
Software package	Internet Explorer .NET framework 4.0 Multimedia player
Processor name	Intel X86 1.33 GHz
Data storage equipment	32 GB CFast card
Port Ethernet	10BASE-T/100BASE-TX/1000BASE-T
Memory description	512 KB NVRAM backup memory 4 GB RAM internal
Number of slots	1 slot(s) for SD card 2 slot(s) for CFast card
Realtime clock	Built-in
Local signalling	LED, multi-colour for status
Type of cooling	Natural convection
Width	188 mm
Height	131 mm
Depth	45 mm
Net weight	0.9 kg

Environment

Standards	CSA C22.2 No 142 ANSI/ISA 12-12-01 UL 508 Class I division 2 CSA C22.2 No 213 IEC 61132-2
Product certifications	CE[RETURN]CULus[RETURN]ATEX[RETURN]IEC-Ex[RETURN]RCM[RETURN]DNV-GL[RETURN]KC[RETURN]CUL[RETURN]EAC[RETURN]UKCA[RETURN]UKEX
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-20...60 °C
Pollution degree	2 conforming to EN 61131-2 Ed.3
Relative humidity	10...90 % non-condensing
Vibration resistance	9.8 m/s² (f = 9...150 Hz) conforming to EN/IEC 61131-2
Electromagnetic compatibility	Electrostatic discharge immunity test level 3 conforming to EN/IEC 61000-4-2

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	13.500 cm
Package 1 Width	21.000 cm
Package 1 Length	26.000 cm
Package 1 Weight	1.215 kg
Unit Type of Package 2	S04
Number of Units in Package 2	4
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	6.042 kg
Unit Type of Package 3	P12
Number of Units in Package 3	16
Package 3 Height	45.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	36.168 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions

External Dimensions

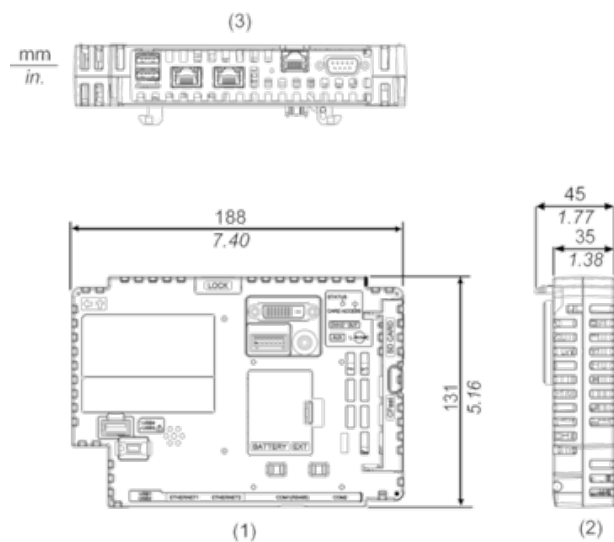

- 1 Front
- 2 Left
- 3 Bottom