


LVS04430

Connection transfer assembly, PrismaSeT P,
universal in duct for 250A 4P, W650mm

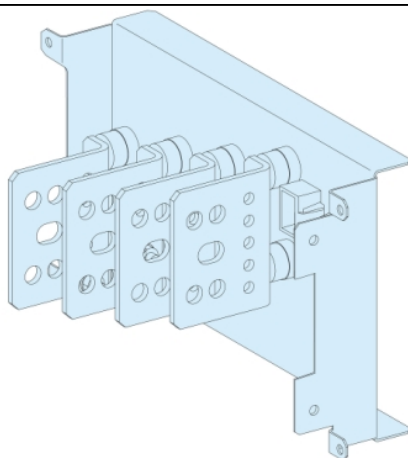

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Connection transfer assembly
Product name	PrismaSeT PrismaSeT P enclosure
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASTA

Complementary

Cubicle-device connection	Connection transfer assembly
Poles description	4P
Installation description	Cubicle - width 650 mm
Installed device	ComPact: fixed NSX100...160 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: toggle horizontal installation

[I _e] rated operational current	250 A
Busbar cross section	20 x 3 mm
Height	200 mm
Net weight	3.56 kg

Quantity per set	Set of 1
------------------	----------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.0 cm
Package 1 Width	27.0 cm
Package 1 Length	40.0 cm
Package 1 Weight	3.541 kg
Unit Type of Package 2	P12
Number of Units in Package 2	45
Package 2 Height	93.0 cm
Package 2 Width	80.0 cm
Package 2 Length	120.0 cm
Package 2 Weight	171.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes