


KSC400DLE4CF

CANALIS ELBOW 400 A MADE TO MESURE WITH FIRE BARRIER

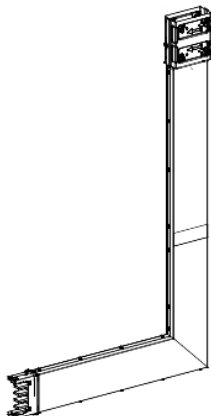

Main

Range of product	Canalis
Product name	KS
Offer type	Standard
Product or component type	Elbow
Busbar description	Fire barrier on made to measure (only one side)
Bar material	Copper
Device application	Change direction
[Ie] rated operational current	400 A at 35 °C
Direction change type	Direction 1: edgewise to upward -
Colour	White (RAL 9001)

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90 °
Busbar trunking polarity	3L + N + PE 3L + PE
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Width	63 mm
Height	147 mm
Length	250...745 Mm for side A 250...745 mm for side B

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Standards	IEC 60439-2 IEC 61439-6

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	27 kg
Package 1 Height	6.4 cm
Package 1 width	82.8 cm
Package 1 Length	98.3 cm