


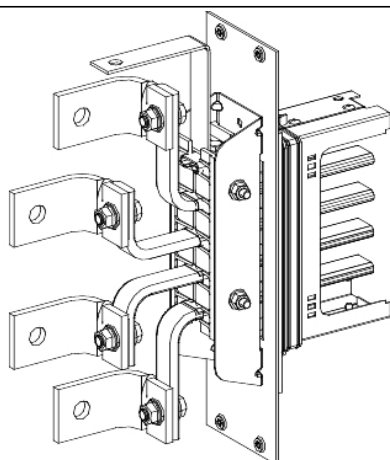

Main

Range of product	Canalis
Product name	KS
Product or component type	Flange feed unit
BAR MATERIAL	Copper
Product compatibility	KS
[Ie] rated operational current	100 A 160 A 250 A
Mounting location	Left Right
Colour	White (RAL 9001)

Complementary

Protection type	Without protection
[Ue] rated operational voltage	230...690 V
Connections - terminals	Bar
Control type	Without
Number of circuits	1
Provided equipment	End cover
Mounting mode	By screws
Mounting support	Busbar
Standards	IEC 60439-2 IEC 61439-6
Width	261.5 mm
Depth	81 mm
Height	294 mm
Body material	Metal
Net weight	3 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	4 kg
Package 1 Height	8 cm
Package 1 width	27 cm
Package 1 Length	30 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product