


Product data sheet

Characteristics

KNA63ED4306

Canalis - straight length - 63 A - 6 tap-off outlets - 3L+N+PE - 3m - white

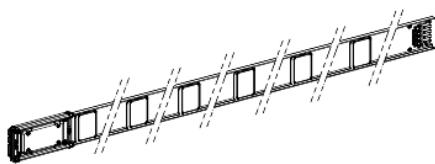

Main

Range of product	Canalis
Product name	KN
Product or component type	Busbar trunking
Busbar description	Distribution length
Device application	Low power distribution
[Ie] rated operational current	63 A at 35 °C
Busbar trunking polarity	3L + N + PE 3L + PEN
Number of tap-off outlets	6
Length	3 m

Complementary

[Ue] rated operational voltage	230...500 V
Network frequency	50/60 Hz
[Uimp] rated impulse withstand voltage	6 kV
[Ui] rated insulation voltage	500 V
[Icw] rated short-time withstand current	1.05 kA
[Ipk] rated peak withstand current	11 kA
Electrical connection	Lubricated sliding contact
Radiated magnetic field	0.063 µT
Thermal stress limit	1800 kA ² .s
THDI	0...15 % 63 A 15...33 % 50 A 33...100 % 40 A
Maximum voltage drop	<0.208 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.196 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.179 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.16 V with power factor = 0.7 at 50 Hz with 1A for 100 m long
Mounting mode	By screws
Neutral position	Up
Number of circuits	1
Control type	Without
Standards	IEC 61439-6 IEC 60439-2
Width	92 mm
Depth	27.5 mm
Colour	White (RAL 9001)
Net weight	5.7 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Ambient air temperature for operation	0...35 °C (100 % of In) 35...40 °C (97 % of In) 40...45 °C (94 % of In) 45...50 °C (91 % of In) 50...55 °C (87 % of In)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	5 kg
Package 1 Height	3.5 cm
Package 1 width	10 cm
Package 1 Length	310 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	4
Package 2 Weight	21 kg
Package 2 Height	10.5 cm
Package 2 width	15.5 cm
Package 2 Length	314 cm
Unit Type of Package 3	PAL
Number of Units in Package 3	48
Package 3 Weight	315 kg
Package 3 Height	45.4 cm
Package 3 width	68 cm
Package 3 Length	320 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------